



BOMINOX
stainless steel pumps

CURVAS CARACTERÍSTICAS
PERFORMANCE CURVES

SIMPLEX-M

50 Hz

Bominox, S.A.

Ctra. de Banyoles, km 14
17844 CORNELLÀ DEL TERRI
(Girona) Spain

Tel. +34 972 595 020

Fax +34 972 595 120

E-mail: info@bominox.com





www.bominox.com





CURVAS CARACTERÍSTICAS / PERFORMANCE CURVES

Bomba tipo / Pump type	SIM-1	Potencia / Power	0.37-0.55-0.75-1.1- 1.5-2.2-3 kW	0.5-0.75-1-1.5- 2-3-4 hp
rpm	2900	Rodete / Impeller Ø (mm)	Abierto 3p / Open 3p	max 150 - min 90
Hz	50	Ø asp / Ø inlet	DN-40 / DN-50	
Código / Code	CSION-101	Ø imp / Ø outlet	DN-32	

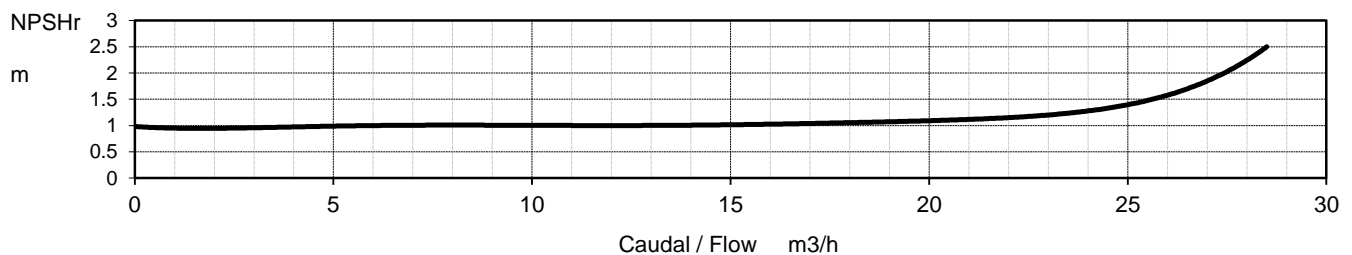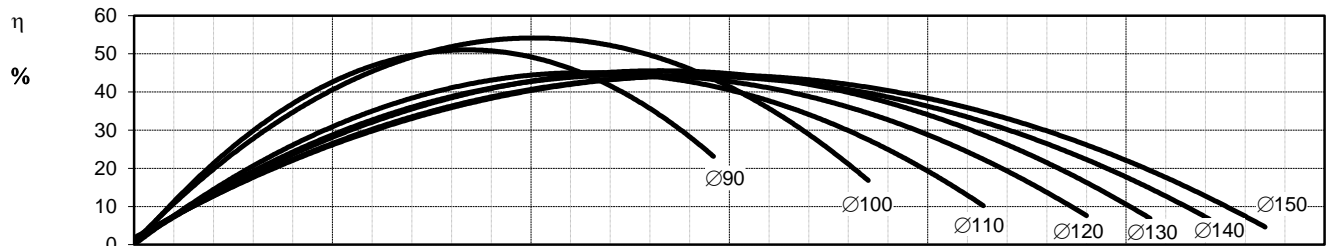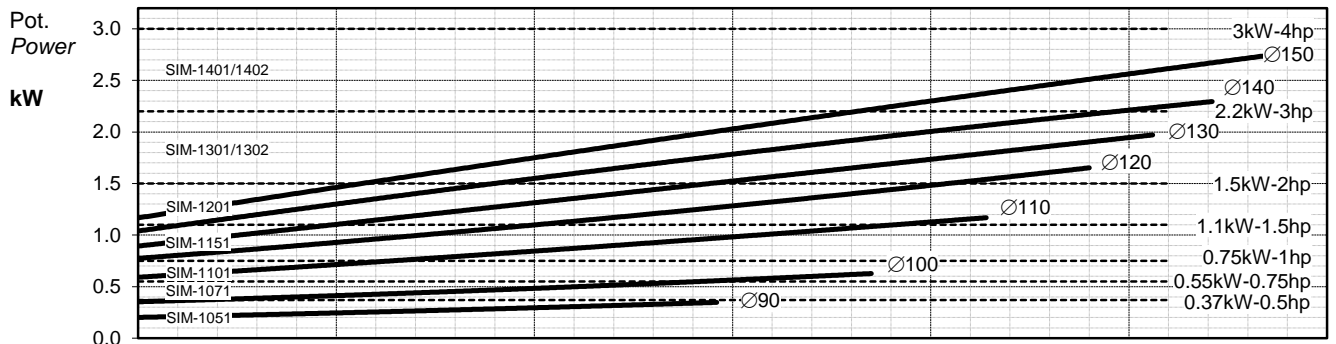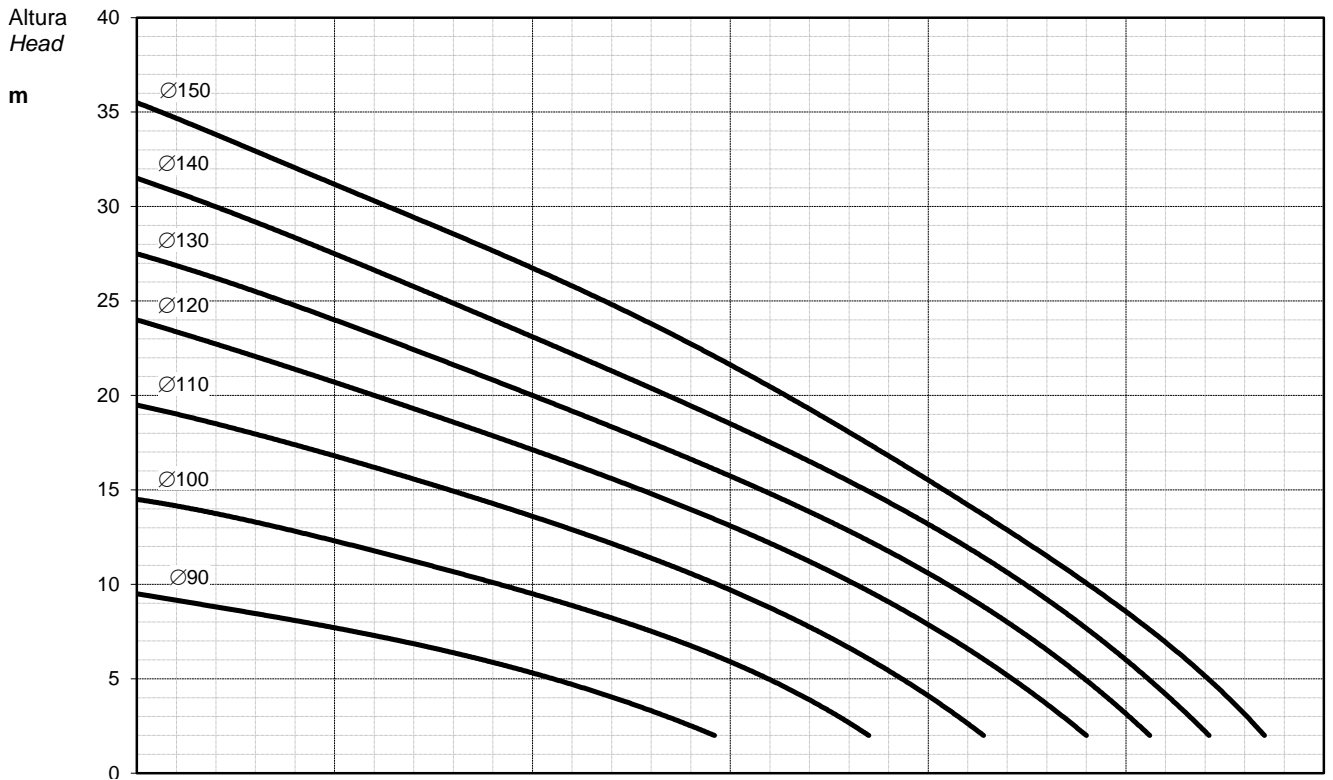



CURVAS CARACTERÍSTICAS / PERFORMANCE CURVES

Bomba tipo / Pump type	SIM-2	Potencia / Power	2.2-3-4-5.5-7.5 kW	3-4-5.5-7.5-10 hp
rpm	2900	Rodete / Impeller Ø (mm)	Abierto 3p / Open 3p	max 200 - min 150
Hz	50	Ø asp / Ø inlet	DN-50 / DN-65	
Código / Code	CSION-102	Ø imp / Ø outlet	DN-40	

